


CMX42AB

Quick Reference Guide

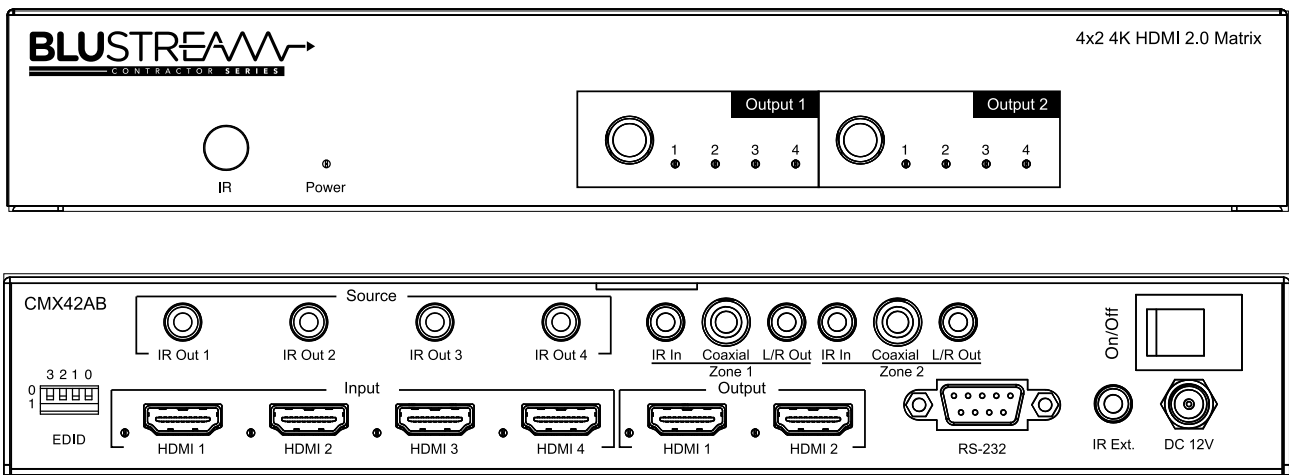

Introduction


Our Contractor CMX42AB 4K HDMI Matrix features HDMI 2.0 chipsets with HDCP 2.2 support, allowing distribution of four HDMI sources to two displays. This enables all sources to be viewed seamlessly as required within a Matrix configuration. The unit transmits all HDMI resolutions up to and including HDR and 4K 60Hz 4:4:4. The 4-Way Matrix also includes audio breakout and EDID management.

Key Features:

- Features 4x HDMI inputs which can be independently routed up to two HDMI outputs
- Supports 4K UHD video including HDR (up to 4K @60Hz 4:4:4)
- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K
- Supports all known HDMI audio formats including Dolby TrueHD, Dolby Atmos, Dolby Digital Plus and DTS-HD Master Audio transmission
- HDMI audio breakout to associated output analogue L/R audio and coaxial digital outputs concurrently
- IR routing
- Supplied with Blustream 5V IR receivers and emitters
- Control via front panel, IR and RS-232
- 3rd Party drivers available for all major home control brands
- Advanced EDID management
- HDCP 2.2 compliant


Panel Description

Front Panel:

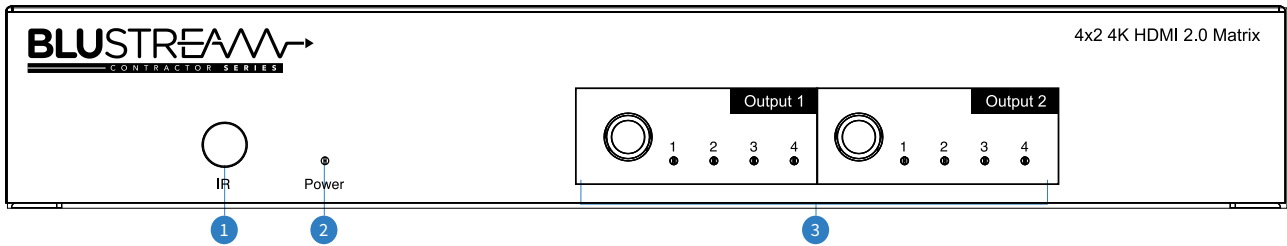

- 1 IR receiver window for Matrix control
- 2 Power LED indicator
- 3 HDMI output selection buttons 1-2. Press to scroll through source inputs per HDMI output

Rear Panel:

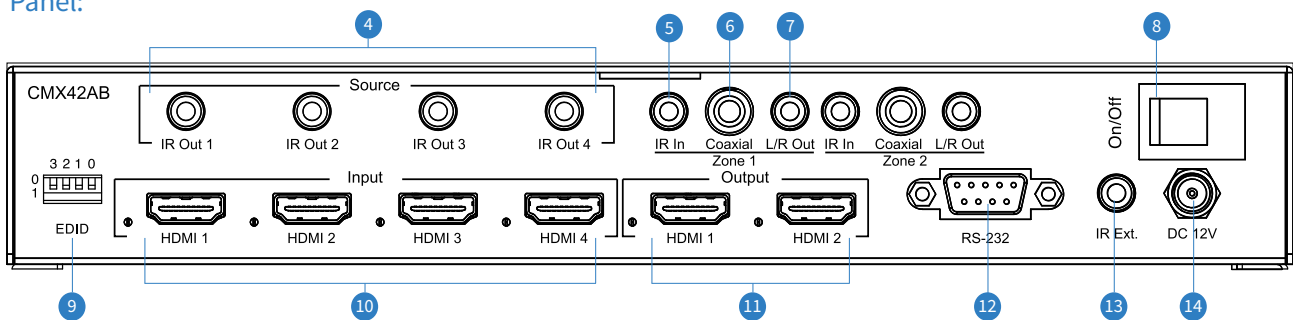

- 4 IR output - 3.5mm mono jack provides routed IR emitter output for discrete control of sources
- 5 IR input - 3.5mm stereo jack provides zone specific routed IR receiver input
- 6 Coaxial digital audio output - RCA (SPDIF)
- 7 Analog L/R audio output - 3.5mm stereo audio jack, Supports 2 channel PCM only
- 8 Power on/off switch
- 9 EDID DIP switch - Used to manage the video and audio resolution output by the connected source device.
- 10 HDMI inputs - connect to HDMI source devices
- 11 HDMI outputs - connect to HDMI display devices
- 12 RS-232 Serial port - For control of switcher by third party control devices
- 13 IR control - IR input for switcher control. Connect 5V Blustream IR receiver
- 14 Power port - Use included 12V/2A DC power adaptor

Adjusting The EDID Settings


The EDID configuration can be altered using the dip-switches located on the rear panel of the Matrix.

Please see adjacent table for EDID settings. Note: You must power-cycle the HDMI Matrix after changes have been made in order for the EDID settings to update.

EDID Dip-switches

- [DIP]=0000: HDMI 1080p@60Hz, Audio 2ch PCM
- [DIP]=0001: HDMI 1080p@60Hz, Audio 5.1ch PCM/DTS/DOLBY
- [DIP]=0010: HDMI 1080p@60Hz, Audio 7.1ch PCM/DTS/DOLBY/HD
- [DIP]=0011: HDMI 1080i@60Hz, Audio 2ch PCM
- [DIP]=0100: HDMI 1080i@60Hz, Audio 5.1ch PCM/DTS/DOLBY
- [DIP]=0101: HDMI 1080i@60Hz, Audio 7.1ch PCM/DTS/DOLBY/HD
- [DIP]=0110: HDMI 4K@60Hz 4:2:0+4K@30Hz 4:4:4, Audio 2ch PCM
- [DIP]=0111: HDMI 4K@60Hz 4:2:0+4K@30Hz 4:4:4, Audio 5.1ch PCM/DTS/DOLBY
- [DIP]=1000: HDMI 4K@60Hz 4:2:0+4K@30Hz 4:4:4, Audio 7.1ch PCM/DTS/DOLBY/HD
- [DIP]=1001: HDMI 4K@60Hz 4:4:4, Audio 2ch PCM
- [DIP]=1010: HDMI 4K@60Hz 4:4:4, Audio 5.1ch PCM/DTS/DOLBY
- [DIP]=1011: HDMI 4K@60Hz 4:4:4, Audio 7.1ch PCM/DTS/DOLBY/HD
- [DIP]=1100: DVI 1280x1024@60Hz, Audio None
- [DIP]=1101: DVI 1920x1080@60Hz, Audio None
- [DIP]=1110: DVI 1920x1200@60Hz, Audio None
- [DIP]=1111: Software Control EDID

EDID Dip-switches



RS-232 Serial Control

The Matrix can be controlled via 9-pin serial RS-232 cable.

| BLUSTREAM RS-232 | | REMOTE CONTROL CONSOLE | |
|------------------|------------|------------------------|------------|
| PIN | Assignment | PIN | Assignment |
| 1 | NC | 1 | NC |
| 2 | Tx | 2 | Rx |
| 3 | Rx | 3 | Tx |
| 4 | NC | 4 | NC |
| 5 | GND | 5 | GND |
| 6 | NC | 6 | NC |
| 7 | NC | 7 | NC |
| 8 | NC | 8 | NC |
| 9 | NC | 9 | NC |

Baud Rate: 57600 bps

Data Bit: 8-bit

Parity: None

Stop Bit: 1-bit


Flow Control: None


| RS-232 COMMAND | DESCRIPTION |
|----------------------------|--|
| ? | Print Help Information |
| HELP | Print Help Information |
| STATUS | Print System Status And Port Status |
| PON | Power On, System Run On Normal Sta |
| POFF | Power Off, System Run On Power Save State |
| IRON/OFF | Set System IR Control On Or Off |
| KEYON/OFF | Set System KEY Control On Or Off |
| BEEPON/OFF | Set Onboard Beep On Or Off |
| LEDON/OFF | Set Front Panel LED Always On or Auto Turn Off in Power On State |
| RESET | Reset System To Default Setting (Type "Yes" To Confirm, "No" To Discard) |
| OUTxxFRON/OFF OUTxxFRyy | Set OUTPUT:xx On or Off Set OUTPUT:xx From INPUT:yy xx=00: Select All OUTPUT Port xx=[01...04]: Select One OUTPUT Port yy=[01...04]: Select One INPUT Port |
| EDIDxxCPyy EDIDxxDFzz | xx=00: Select All INPUT Port xx=[01...04]: Select One INPUT Port yy=[01...04]: Select One OUTPUT Port zz=00: HDMI 1080p@60Hz, Audio 2CH PCM zz=01: HDMI 1080p@60Hz, Audio 5.1CH DTS/DOLBY zz=02: HDMI 1080p@60Hz, Audio 7.1CH DTS/DOLBY/HD zz=03: HDMI 1080i@60Hz, Audio 2CH PCM zz=04: HDMI 1080i@60Hz, Audio 5.1CH DTS/DOLBY zz=05: HDMI 1080i@60Hz, Audio 7.1CH DTS/DOLBY/HD zz=06: HDMI 1080p@60Hz/3D, Audio 2CH PCM zz=07: HDMI 1080p@60Hz/3D, Audio 5.1CH DTS/DOLBY zz=08: HDMI 1080p@60Hz/3D, Audio 7.1CH DTS/DOLBY/HD zz=09: HDMI 4K@30Hz 4:4:4, Audio 2CH PCM zz=10: HDMI 4K@30Hz 4:4:4, Audio 5.1CH DTS/DOLBY zz=11: HDMI 4K@30Hz 4:4:4, Audio 7.1CH DTS/DOLBY/HD zz=12: DVI 1280x1024@60Hz, Audio None zz=13: DVI 1920x1080@60Hz, Audio None zz=14: DVI 1920x1200@60Hz, Audio None zz=15: User EDID 1 zz=16: User EDID 2 zz=17: GUI Download EDID zz=18: HDMI 4K@60Hz 4:2:0, Audio 2CH PCM zz=19: HDMI 4K@60Hz 4:2:0, Audio 5.1CH DTS/DOLBY zz=20: HDMI 4K@60Hz 4:2:0, Audio 7.1CH DTS/DOLBY/HD zz=21: HDMI 4K@60Hz 4:4:4, Audio 2CH PCM zz=22: HDMI 4K@60Hz 4:4:4, Audio 5.1CH DTS/DOLBY zz=23: HDMI 4K@60Hz 4:4:4, Audio 7.1CH DTS/DOLBY/HD |

Audio Breakout

The Matrix includes audio breakout from the selected HDMI input to associated analogue L/R audio and coaxial digital outputs. Extracted audio will be concurrent with the corresponding HDMI video output. Note: Source input must be PCM 2ch audio for analogue audio outputs to work. The Matrix does not down-mix multi-channel audio signals.

- 1 Coaxial digital output - Output 1
- 2 Analogue fixed line level output 3.5mm stereo jack - Output 2

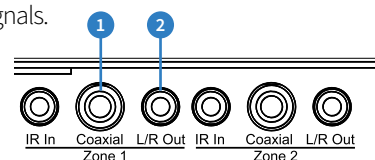

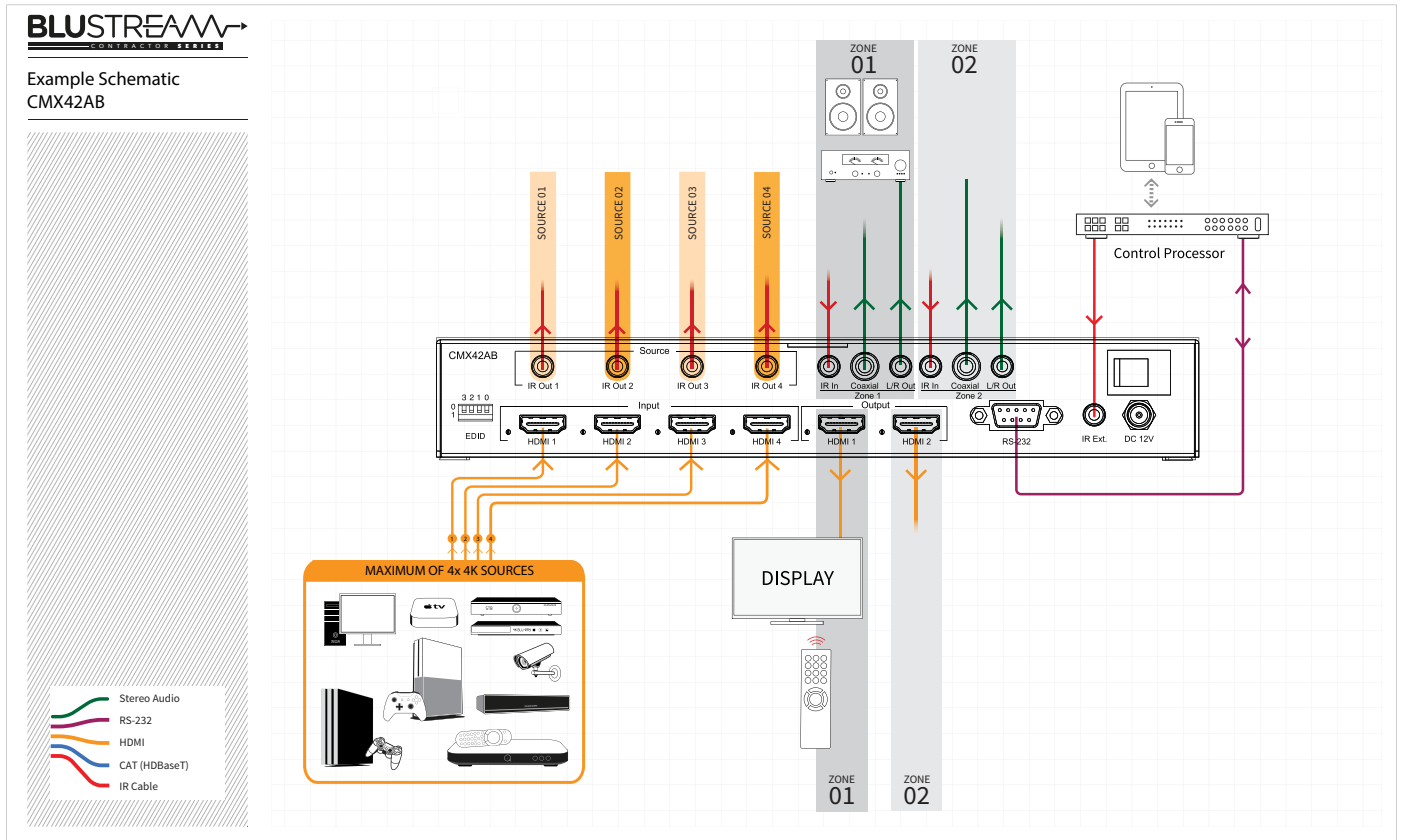

Specifications:

- Video Input Connectors:** 4x HDMI Type A, 19-pin, female
- Video Output Connectors:** 2x HDMI Type A, 19-pin, female
- Audio Output Connectors:** 2x RCA (SPDIF), 2x 3.5mm stereo jack (L/R)
- RS-232 Serial Port:** 1x DB-9, female
- IR Input Ports:** 3x 3.5mm stereo jack
- IR Output Ports:** 4x 3.5mm mono jack
- EDID:** 4-Pin DIP switch
- Casing Dimensions (W x D x H):** 255mm x 104mm x 40mm
- Dimensions Inc. Connections (W x D x H):** 255mm x 115mm x 47mm
- Shipping Weight:** 1.5kg
- Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- Storage Temperature :** -4°F to 140°F (-20°C to 60°C)
- Power Supply :** 12V/2A DC

Package Contents:

- 1x CX42AB
- 1x 12V/2A DC power supply
- 1x Remote control
- 4x IR emitter
- 3x IR receiver
- 1x Mounting kit
- 1x Quick reference guide