


Technical specifications

| | |
|-----------------|--------------------|
| Nb of Input | 8 |
| Nb of Output | 1 |
| Frequency range | 950-2150 MHz |
| Insertion loss | 4 +/- 1 dB |
| Isolation | 25 dB min. |
| Consumption | 30 mA / receiver |
| Protocol | DiSEqC 1.0/1.1/1.2 |
| DC power pass | 500 mA |
| Connectors | "F" |
| Unit weight | 0,6 kg |
| Dimensions | 185 x 144 x 71 mm |




Mounting

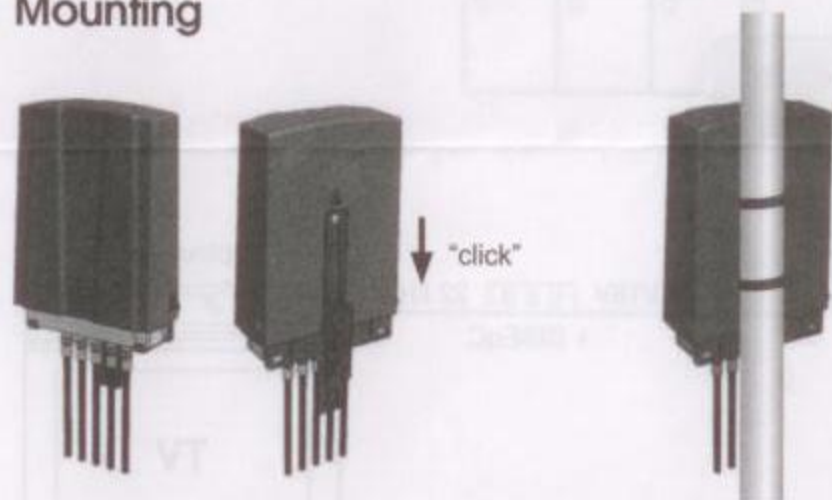

- Connect the coax cables to the switch.
- Mount the switch on the mast with the 2 provided straps.
- Push down the plastic cap which has to click on the fixed part.

The active combiner can be mounted on a wall.

- Remove the plastic cap.
- Remove the metal housing from the holder part and fix it on the wall.

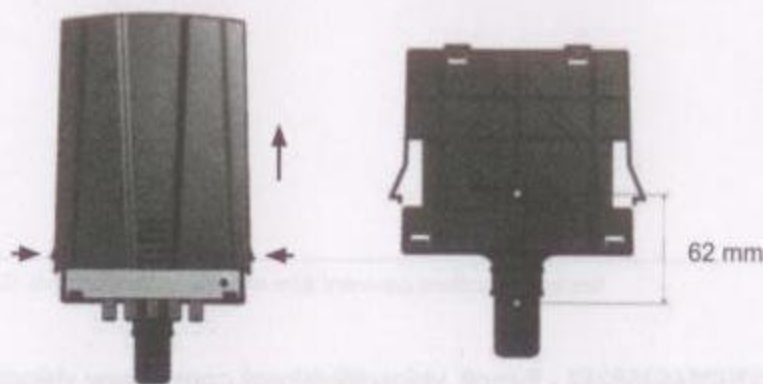

Application

It allows to receive up to 8 satellites from the BIG BISAT multi beam dish.

