



CSF506

Ceiling speaker with fire dome 100V


Highlights:

- Multi-tapping 100V line transformer
- 5" full range driver
- Steel front grill with flame retardant materials
- Steel fire protection dome


The CSF506/W is a fire-protected ceiling speaker with a 5" cone, capable of producing a power of 6 Watt. It ensures a good reproduction of speech and background music. It is fitted with a 100V line transformer with power taps for 6 Watt and 3 Watt to be used in large 100V PA systems. The speaker is equipped with a special steel fire protection dome fitted around the speaker and a steel front grill with flame retardant materials. This provides the fire protection according to the EN60849 standard.

Applications:

- Bars, restaurants
- Retail
- Hotels
- Public facilities
- Corporate spaces

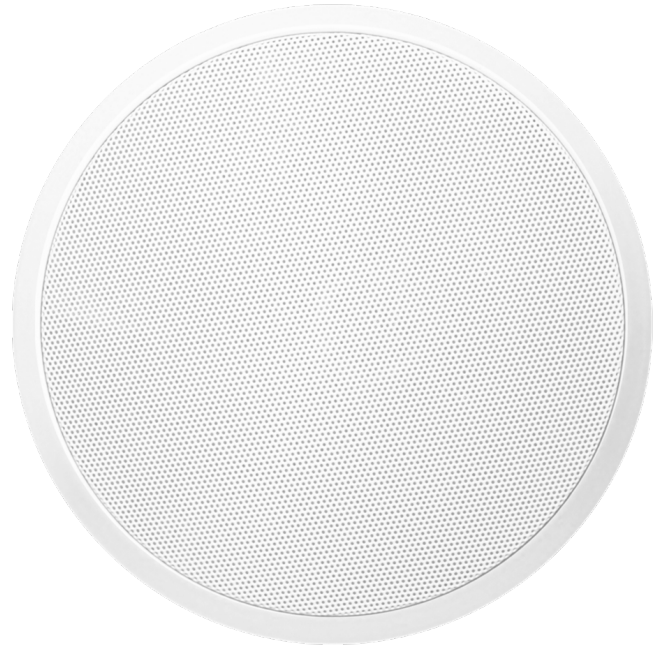

Voltage:



System specifications:

Speaker type		Broadband
Max. Power		10 W
RMS Power		6 W
Line Transformer Tappings	1	6 W / 1666 Ω
	2	3 W / 3333 Ω
Impedance		8 Ω
Frequency	Response (\pm 3 dB)	90 Hz - 18 kHz
Sound Pressure (Max. W/1m)		90 dB
Drivers		5"

Product Features:

Dimensions	180 x 127 mm (\emptyset x D)
Cut-out measurement	160 mm (\emptyset)
Weight	1.300 kg
Construction	Steel fire protection dome
Front finish	Steel with flame retardant materials

